

YH Series Solenoid Valve



● YH23JD-8
● YH23JD-15

● YH23JD-15P₂

Character

This product can be used under high pressure circumstance, safety, has been adopted widely in high pressure pneumatic equipment such as Blow Bottle Machine, especially apply successfully in equipment that produce special shape, big capacity polyurethane bottle.

Ordering Code

YH23J
Series
2 Positions/3 Ports
High Pressure Valve

D
Control Form
D : Single Solenoid
Operated


8
Pipe Size
8 : G1/4 (M12x1.25)
15 : G1/2 (M20x1.5)

P₂
Pilot Way
No Mark :
Internal Pilot
P₂ : External Pilot

Graphics Sign



● YH23JD-8 □



● YH23JD-15P₂ □


Technical Parameter

Item\Specification	YH23JD-8 YH23JD-8P ₂	YH23JD-15 YH23JD-15P ₂
Pressure Range	0.15 ~ 2.4 MPa	
Medium Temperature	-5 ~ 60 °C	
Applicable Medium	Air	
Lubrication	Needless	
Nominal Diameter	8 mm	15 mm
Direction Change Time	≤ 0.04 S	≤ 0.08 S
Pipe Size	G1/4	G1/2
Power	AC220V: 20VA DC24V: 13W	


YH Series Solenoid Valve

Figure Dimension

● YH23JD-8

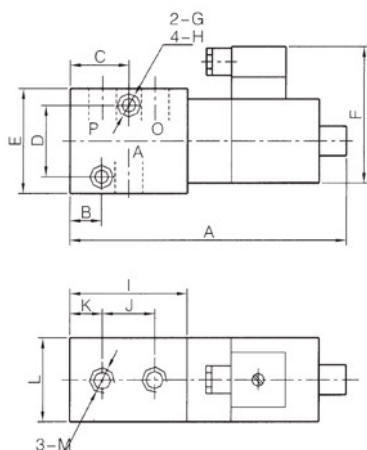


● YH23JD-8P₂

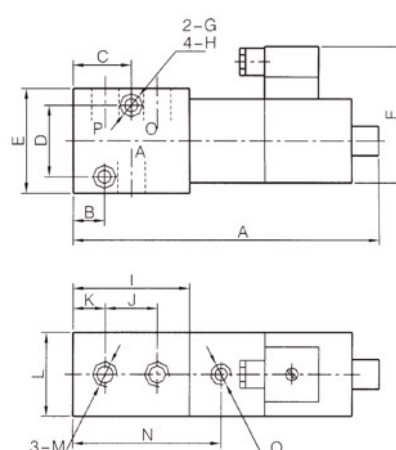


TYPE	K	A	B	C	D	E	F	G	H	I	J	K	L	N	O
YH23JD-8	G1/4	132	15	28	34	50	65	6.5	11	56	25	15.5	40	-	-
YH23JD-8P ₂	G1/4	145												75	G1/8

● YH23JD-15

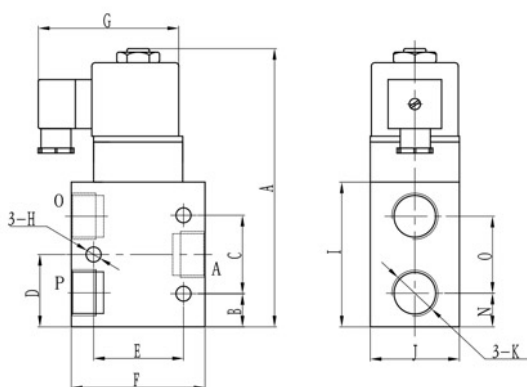

● YH23JD-15P₂

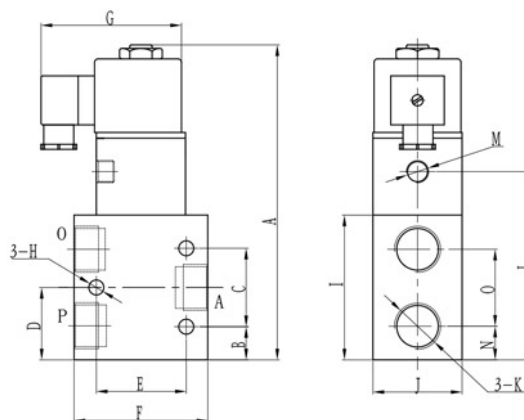

TYPE	K	A	B	C	D	E	F	G	H	I	J	L	M	N
YH23JD-15	G1/2	140	15.5	34	32.5	40	60	65	6.5	65	60	-	-	10.5
YH23JD-15P ₂	G1/2	157										84.5	G1/8	