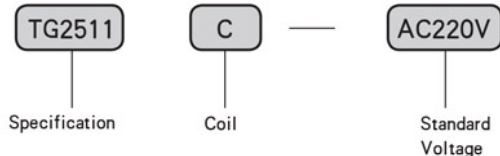






Coil

● Ordering Code









● Character

The coils produced by our company are in various types and specifications with handsome shape, reliable performance, long service life, low consumption of power, high and low temperature resistance, good fire resistance and high mechanical strength, it can meet the requirements of different pneumatic elements. They are multiple designed pressures for your choice. Special specifications can be made to order (AC12V~AC380V, DC6V~DC220V).

Type	Power	Picture	Figure Dimension	Suitable Type
TG2511CT-□	AC220V: 4VA DC24V: 2.6W			TG2511-06 TG2512-06
4V210CL-□	AC220V: 5VA DC24V: 4.8W			4V210-08, 4V310-10 4V410-15, TG2321-08 TG2331-10, TG2521-08 TG2522-08T, G2531-10 TG2532-10T, G2541-15 TG2542-15T, G2521-06 TG2521-08M, TG3522-08C TG3532-10C,
TG2521CL-□	AC220V: 5VA DC24V: 4.8W			
TG2521CL-□ S S: Die Cast Coil	AC220V: 5VA DC24V: 4.8W			TG2321-08 TG2331-10, TG2521-08 TG2522-08T, G2531-10 TG2532-10T, G2541-15 TG2542-15T, G2521-06 TG2521-08M, TG3522-08C TG3532-10C, FG2521-08 FG2522-08, FG2531-10 FG2532-10

2/3

Type	Power	Picture	Figure Dimension	Suitable Type
UX23-2LC-□	AC220V; 10VA DC24V; 9W			UX22-2L, UX23-2L
UD-8C-□	AC220V; 9VA DC24V; 11W			UZ-B-06, UZ-B-08 UZ-B-10 UZ-C-06, UZ-C-08 UZ-C-10 UD-8, UD-6 UF-06, UF-08, UF-10 UW-C-06, UW-C-08 UW-C-10
UW-25C-□	AC220V; 12VA DC24V; 20W			UW-25, UW-20, UW-15, UW-10, UD-10
USC-□	AC220V; 20VA DC24V; 44W			US-10, US-15, US-20, US-25, US-35, US-40, US-50, UW-35, UW-40, UW-50
TUWC	AC220V; 12.5W DC24V; 22.5W			TUW-10, TUW-15 TUW-25, TWS-10 TWS-15, TWS-20 TWS-25, UWK-15 UWK-20, UWK-25
TUSC	AC220V; 20W DC24V; 30W			TUS-10, TUS-15, TUS-20 TUS-25, TUS-35, TUS-40 TUS-50, TUW-35, TUW-40 TUW-50, TWS-35, TWS-40 TWS-50