

TE Series Solenoid Valve



● TE-15




● TE-20




● TE-25

Graphics Sign



Ordering Code

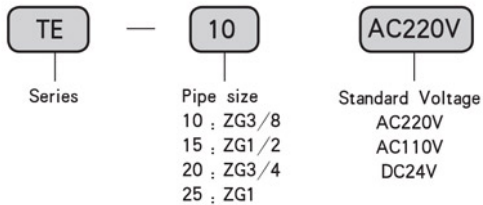


Specific Property

This guiding type valve adopts the diaphragm seal structure with quick action, large flow, simple structure, easy maintenance, good waterproof performance and multiple wiring directions.

Technical Parameter

Item \ Specification	TE-10	TE-15	TE-20	TE-25
Material of Body	Brass			
Operating Method	Film Pilot			
Nominal Diameter(mm)	13	13	20	25
Applicable Medium	Air	Water	Oil(50CST Below)	
Pressure Range	-10 ~ 60℃		1 ~ 60℃	-5 ~ 60℃
Medium Temperature	0.1 ~ 1MPa			
Specified Voltage	AC24V、AC110V、AC220V、DC24V			
Operating Voltage Range	±10%			
Min. Activating Time	0.05S			
Power	AC220V : 13VA 、DC24V :9W			

Figure Dimension

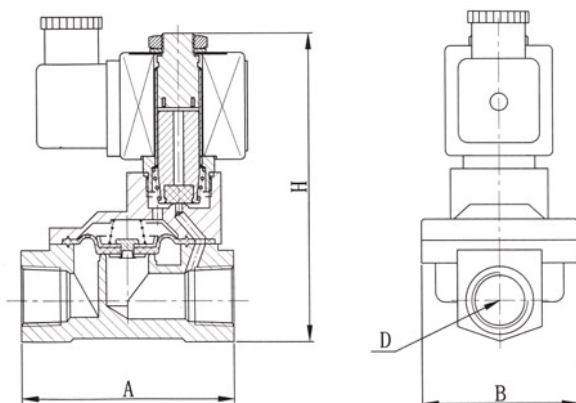

Specification	A	B	D	H
TE-10	66	48	ZG3/8	112
TE-15	66	48	ZG1/2	112
TE-20	96	70	ZG3/4	131
TE-25	96	70	ZG1	131