


## HO Series Hydraulic Cylinder (Rated Pressure:14MPa)

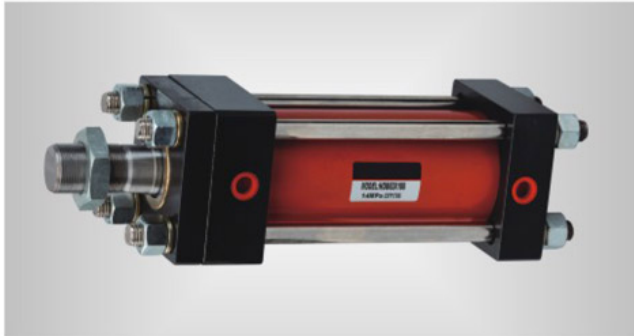


**HO - 50×50 - S - FA**

**Bore × stroke**

**Magnet code**  
Blank: no magnetic  
S: with magnetic

**Series**  
HOB: standard double acting type  
HOD: double rod type  
HOJ: double rod adjustable type

**Mounting**  
Blank: basic/without bracket  
CA: single rear clevis  
CB: double rear clevis  
FA: front flange  
FB: rear flange  
LB: axial foot

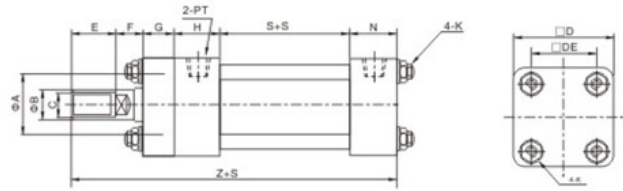

Bore	φA	φB	C	□D	□DE	E	F	G	H	N	K	S	Z	PT
φ40	40	25	M22×1.5	65	45	40	20	17	33	28	M10	50	188	ZG3/8
φ50	45	30	M26×1.5	80	56	40	20	17	38	30	M12	55	200	ZG3/8
φ63	50	35	M30×1.5	95	65	45	20	17	38	30	M14	55	205	ZG3/8
φ80	60	40	M30×1.5	110	80	45	20	20	38	35	M16	74	232	ZG1/2
φ100	70	50	M40×2	130	95	55	25	20	41	37	M18	84	262	ZG1/2
φ125	80	60	M50×2	162	122	70	35	28	57	47	M24	84	321	ZG3/4
φ160	95	80	M70×2	210	153	80	35	30	60	50	M27	90	345	ZG3/4
φ200	135	100	M90×2	262	193	120	40	40	65	60	M33	120	445	1"
φ250	146	125	M110×2	330	246	140	50	45	80	70	M39	140	525	1"