

TAV soft start valve series



● TAV2000-02

● Character

Slow start solenoid valve can be used in the system of security protection. The initial it allows only a small amount of air through the (flow rate can be adjusted). Half when the outlet pressure to inlet pressure, the valve is fully open, the maximum flow.


● Ordering Code

TAV	2000	02	AC220V
Series	Type	Pipe Size	Standard voltage
	2000	02 : G1/4	AC110V
	3000	03 : G3/8	AC220V
	4000	04 : G1/2	DC24V
			DC12V

■ Technical Parameter

Specification	TAV2000-02	TAV3000-03	TAV4000-04
Applicable Medium	Air		
Applicable Pressure Range	0.2 ~ 1MPa		
Medium Temperature	0 ~ 60°C		
Standard voltage	AC110V	AC220V	DC24V DC12V

■ Figure Dimension

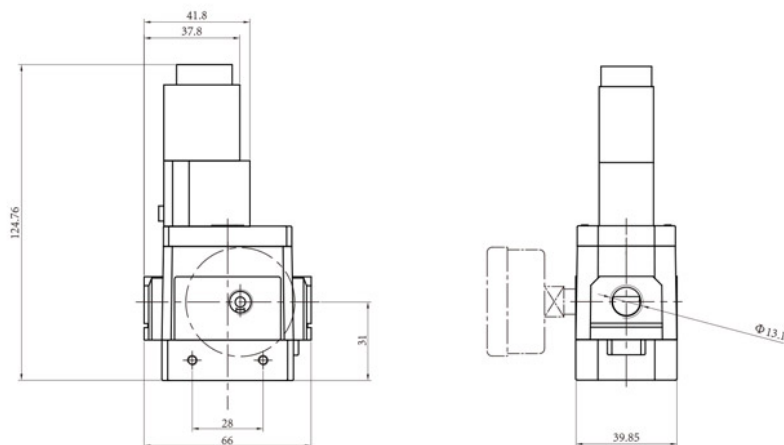

● TAV2000-02