

CA2W/CDA2W Series Standard Cylinder

Double Acting, Double Rod



Character

Without lubricating: Needn't lubricating on piston rod for using oiled axle tree.

Durability: With oxidative steel tube, cover deal with electrophoresis, it is not only anticorrosive, durable and wear-resistant, but also has compact shape.


Kinds of mounting: Have kinds of accessories to choose.

Adjustable stroke: Attached with adjustable nut, the operator can adjust the stroke within its stroke range.

Graphics Sign



Ordering Code

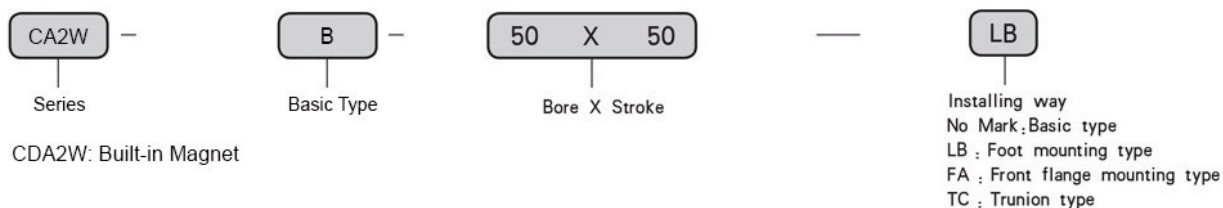

Ordering example

- 1) Bore: 50mm, Stroke: 50mm, LB installation, Code: CA2W50X50-LB
- 2) Bore: 32mm, Stroke: 100mm, FA installation, Code: CA2W32X100-FA

Standard Specification

Bore (mm)	32	40	50	63	80	100	125	160	200
Action	Double action type								
Applicable medium	Air								
Pressure range	0.08 ~ 1.0 Mpa								
Proof pressure	1.5 MPa								
Temperature range	-10 ~ 60°C								
Speed range	50 ~ 500 mm/s								
Cushion type	Adjustable Air Cushion								
Cushion stroke(mm)	24 mm					32 mm			
Prot Size	G1/8	G1/4		G3/8		G1/2		G3/4	

