

TUS Series High-temperature Solenoid Valve



● TUS-50




● TUS-25



● TUS-15

■ Graphics Sign



● Ordering Code

TUS	10	AC220V
TUS Series	Pipe size 10 : ZG3/8 15 : ZG1/2 20 : ZG3/4 25 : ZG1 35 : ZG1 1/4 40 : ZG1 1/2 50 : ZG2	Standard Voltage AC110V AC220V AC380V DC24V


■ Character

It adopts teflon hard seal structure, with reliable performance, anticorrosion, high-temperature resistance, large flow, high pressure, good waterproof performance and multiple wiring directions.

■ Technical Parameter

Item \ Specification	TUS-10	TUS-15	TUS-20	TUS-25	TUS-35	TUS-40	TUS-50
Material of Body	Foundry						
Operating Method	Plunger pilot						
Pipe Size	ZG3/8	ZG1/2	ZG3/4	ZG1	ZG1 1/4	ZG1 1/2	ZG2
Nominal Diameter(mm)	17	17	17	20	30	30	50
Applicable Fluid	Air, Water, Oil(20CST Below), Steam						
Pressure Range	0.05 ~ 1.5MPa						
Medium Temperature	-5 ~ 185°C (No Freeze)						
Specified Voltage	AC24V, AC36V, AC110V, AC220V, AC380V, DC24V, DC110V						
Operating Voltage Range	±10%						
Min. Activating Time	0.05S						
Install Method	Horizontal Installation						
Power	AC220V : 20VA , DC24V : 30W						

■ Figure Dimension

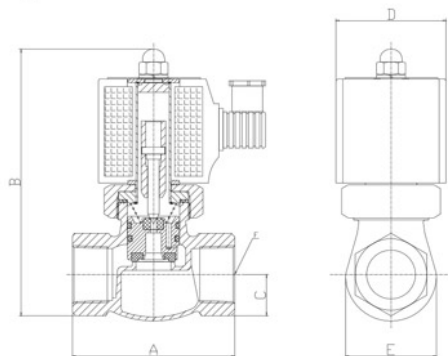

Specification	A	B	C	D	E	F
TUS-10	85	136	15	63	40	ZG3/8
TUS-15	85	136	15	63	40	ZG1/2
TUS-20	85	136	20	63	40	ZG3/4
TUS-25	93	146	23	63	52	ZG1
TUS-35	112	166	35	63	70	ZG1 1/4
TUS-40	112	166	35	63	70	ZG1 1/2
TUS-50	168	205	45	63	86	ZG2