

● Ordering Code

TGD

Type:
TGD TGI TGG

32

Bore size

LB

Accessory Type




Blank: standard style
F: Cast iron material

TGD/TGI/TGG Installing Accessories

Accord : ISO15552(ISO6431)
VDMA24562

TGD: $\Phi 32$ - $\Phi 125$
TGI: $\Phi 32$ - $\Phi 200$
TGG: $\Phi 32$ - $\Phi 320$


● LB

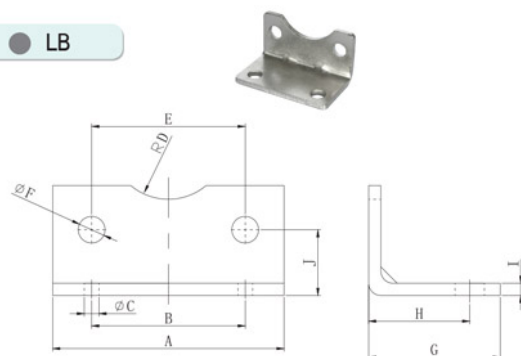

Bore	A	B	C	D	E	G	H	I	F	J
32	46.5	32	7	16	32.5	30.5	23	4	7	15.75
40	52.5	36	9	19	38	37	26.5	4	7	17
50	65	45	9	21	46.5	41.5	30.5	4	9	21.75
63	75	50	9	24	56.5	44.5	32.5	4	9	21.75
80	94.5	63	12	24	72	56	41	5	11	27
100	114.5	75	14	29	89	58.5	40	5	11	26.5


● FA、FB

Cast iron specification :
 $\Phi 32$ -320

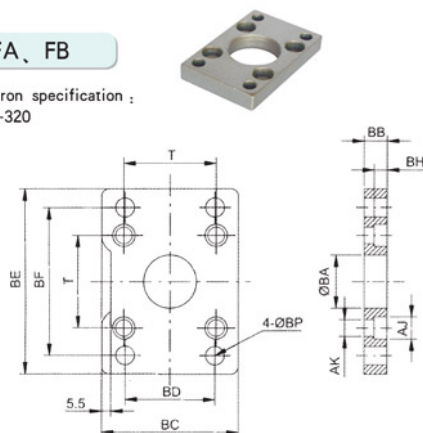


Bore	BP	BB	BC	BD	BE	BF
32	7	10	45	32	80	64
40	9	10	52	36	90	72
50	9	12	65	45	110	90
63	9	12	76	50	120	100
80	12	16	94	63	150	126
100	14	16	112	75	175	150
125	16.5	20	139	90	218	180
160	18.5	20	180	115	280	230
200	24	25	220	135	320	270
250	26	25	280	165	395	330
320	33	30	353	200	475	400

● TC 型



Bore	32	40	50	63	80	100	125	160	200	250	320
A	50	63	75	90	110	132	160	200	250	320	400
B	12	16	16	20	20	25	25	32	32	40	50
C	12	16	16	20	20	25	25	32	32	40	50
D	50	60	75	90	110	132	160	203	250	320	400
E	30	32	34	41	44	48	48	58	60	70	70

● TCM




Bore	32	40	50	63	80	100	125	160	200
A	40	54	54	70	70	90	90	110	110
B	60	75	75	85	85	115	115	140	140
C	12	16	16	20	20	25	25	32	32
D	11	11	11	11	11	19	19	24	24
E	9	12	12	12	12	18	18	22	22
F	12	16	16	20	20	25	25	32	32

● CR

(Used with CB)

Cast iron specification : $\Phi 32-320$
Aluminium specification : $\Phi 32-100$

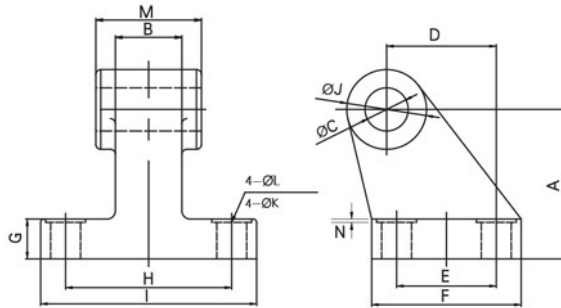

TGD/TGI/TGG Installing Accessories


Accord : ISO15552 (ISO6431)
VDMA24562

Bore	32	40	50	63	80	100	125
A	32	36	45	50	63	71	90
C	10	12	12	16	16	20	25
D	21	24	33	37	47	55	70
E	18	22	30	35	40	50	60
F	31	35	45	50	60	70	90
G	8	10	12	12	14	15	20
H	38	41	50	52	66	76	94
I	51	54	65	67	86	96	124
J	20	22	24	30	30	38	44
K	6.6	6.6	9	9	11	11	14
L	11	11	15	15	18	18	20
M	25.8	27.8	31.8	39.8	49.8	59.8	70
N	1.6	1.6	1.6	1.6	2.5	2.5	3.2

● CA

(Used with CB)


Cast iron specification : $\Phi 32-320$
Aluminium specification : $\Phi 32-100$

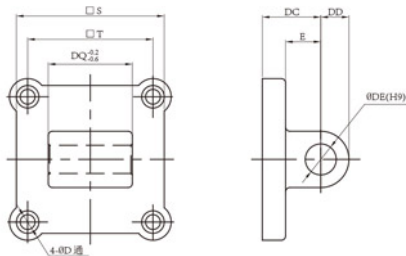

Bore	S	T	DC	DD	E	DE
32	45	26	22	10	12	10
40	52	28	25	12	15	12
50	65	32	27	12	17	12
63	76	40	32	15	22	16
80	94	50	36	16	24	16
100	112	60	41	20	25	20
125	139	70	50	25	35	25
160	180	90	55	30	35	30
200	220	90	60	30	36	30
250	280	110	70	41	46	40
320	353	120	80	46	52	45

● CB

Cast iron specification : $\Phi 32-320$
Aluminium specification : $\Phi 32-100$

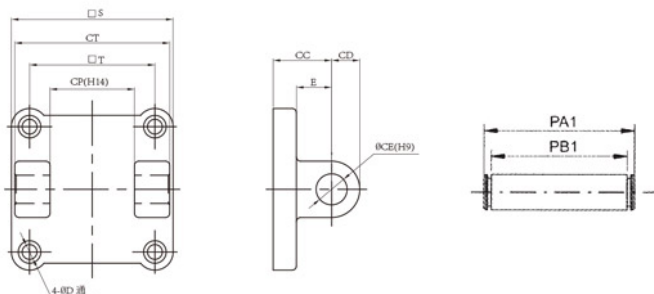

Bore	S	PB1	CC	CD	E	CE	CT	PA1
32	45	45	22	10	12	10	26	51
40	52	52	25	12	15	12	28	59
50	65	60	27	12	17	12	32	67
63	76	70	32	15	22	16	40	78
80	94	90	36	16	24	16	50	98
100	112	110	41	20	25	20	60	120
125	139	130	50	24	33	25	70	140
160	180	170	55	60	35	30	90	181
200	220	170	60	60	36	30	90	181
250	280	200	70	70	46	40	110	220
320	353	220	80	80	52	45	120	240