



## Vacuum operating Valve



● ZK-06



● ZK-08

### Technical Parameter

| Item<br>Specification | Pipe<br>Size | Nozzle<br>Dia. (mm) | Applicable<br>Medium | Air<br>displacement<br>L/Min | Up-to Vacuum<br>degree<br>-Kpa (-mmHg) | Air<br>Consumption<br>L/min | Applicable<br>pressure<br>-Mpa (Kgf/cm <sup>2</sup> ) | Medium<br>Temperature |
|-----------------------|--------------|---------------------|----------------------|------------------------------|----------------------------------------|-----------------------------|-------------------------------------------------------|-----------------------|
| ZK-06                 | G1/8         | 1                   | Air                  | 27                           | -91.8(690)                             | 44                          | 0.5(5)                                                | 0 ~ 60°C              |
| ZK-08                 | G1/4         | 1.5                 |                      | 63                           | -91.8(690)                             | 100                         | 0.5(5)                                                |                       |
| ZK-10                 | G3/8         | 2                   |                      | 110                          | -91.8(690)                             | 180                         | 0.5(5)                                                |                       |

### Ordering Code


ZK

Series

06

Pipe size

### Figure Dimension

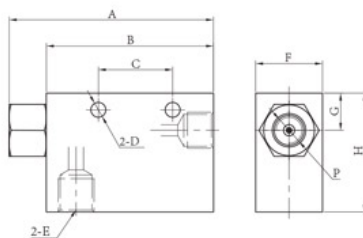

| Specification | ZK-06 | ZK-08 | ZK-10 |
|---------------|-------|-------|-------|
| A             | 55    | 78    | 105   |
| B             | 45    | 63    | 85    |
| C             | 20    | 25    | 31.5  |
| D             | φ 4   | φ 4.6 | φ 6   |
| E             | G1/8  | G1/4  | G3/8  |
| F             | 16    | 20    | 25    |
| G             | 10    | 11    | 15    |
| H             | 32    | 35    | 40    |
| P             | G1/8  | G1/4  | G1/4  |